


# SPV SERIES

## Remote Proportioning Valve

### Technical Specifications

SPV Remote Proportioning Valve provides reliable proportioning from 0 to 100% of two materials (typically virgin and regrind). A convenient window provides immediate inspection. Quick-release top enables fast, easy cleanout for material changes. 45 degree angled design decreases flex hose wear for less maintenance.

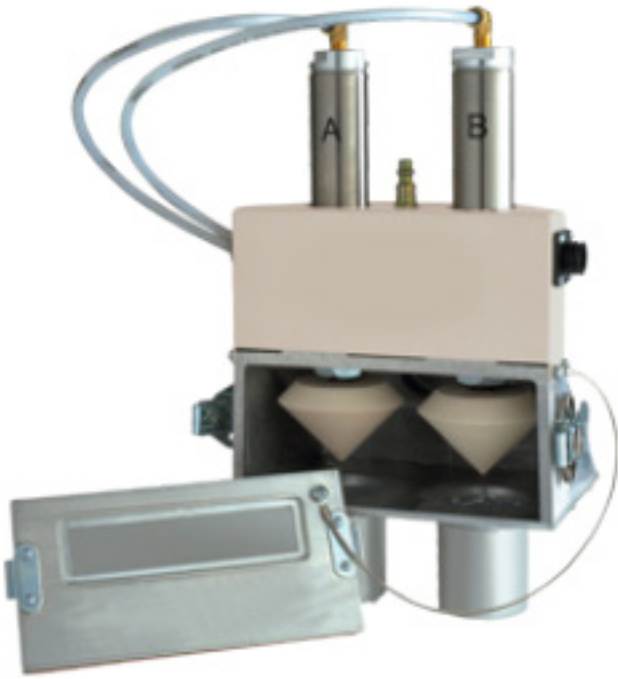

### Features

#### Standard Features

- Corrosion resistant Aluminum construction
- Air operated
- 24VDC or 110 VAC operation
- Dual Solenoid operation (except 3")
- Material Viewing window
- Quick release lid for east cleaning
- Lanyard attached to lid to prevent loss
- 2x aluminum pickup wands
- 2x 10' vinyl flex hoses, four hose clamps

- Central Vacuum System or Hopper Loader compatibility
- O-ring coupler, and a controller assembly with quick-connect cable assembly
- Line sizes available:
  - 1.5"
  - 2.0"
  - 2.5"
  - 3.0"

#### Optional Features

- Hopper-mount, wall-mount, or floor stand
- Spare controller assembly
- Single Solenoid operation
- Consult factory for other line sizes or voltages

## Specifications

- Available in 1.5", 2.0" and 2.5" Outer Diameter inlet/outlet tubes.
- Hopper Mount
- Stand Mount
- Wall Mount

| Voltage Configuration | Supply Voltage | Control Voltage |
|-----------------------|----------------|-----------------|
| B24                   | 115/1/50-60    | 24 VDC          |
| B115                  |                | 115/1/50-60     |
| E24                   | 24 VDC         | 24 VDC          |